

# WIDEX MOMENT™ sRIC R D WITH V.2 RIC P-RECEIVER



The WIDEX sRIC R D is part of the WIDEX MOMENT™ family. Built around the WIDEX MOMENT™ platform to deliver better sound via TruAcoustics™ and the revolutionary Widex PureSound™ paradigm and all on a brand-new chip with greater connectivity.


Fitting sRIC is easier than ever before, thanks to TruAcoustics™ giving a more powerful personalised sound.

The sRIC is powered by a built-in lithium-ion battery and charged wirelessly by the matching sRIC charger or the Charge n Clean model.

WIDEX is offering a brand new design and hearing aid form factor in one-tone colours. App support is offered via the direct bluetooth connection to iOS and Android, which also enables connection to TV PLAY.

- Direct mobile wireless connectivity (2.4 GHz)
- Compatible with the DEX assistive listening devices
- 4 performance levels: 440/330/220/110
- Uses V.2 Easyware P-receiver
- Works with a physically smaller and more powerful receiver that covers a larger fitting range
- Powered by a lithium-ion rechargeable battery
- Hearing loss up to severe-to-profound
- Protection class IP68

## SUGGESTED FITTING RANGE

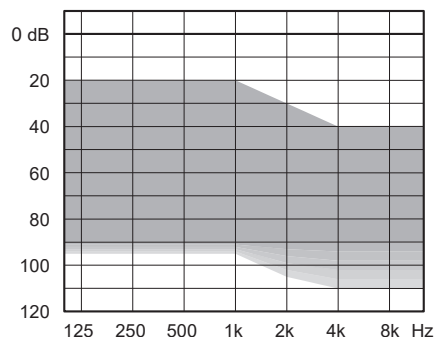

## STANDARD TECHNOLOGY

- WIDEX MOMENT™ platform with Personal Gain Integrator and ZeroDelay™ Technology
- Widex PureSound™ — new paradigm in sound processing
- TruAcoustics™ for improved sound and fitting
- New Zen/Relax tones in the hearing aid.

KEY FEATURES	440	330	220	110
Performance	*****	*****	****	..
Processing and fine-tuning channels	15	12	10	6
Widex PureSound™ with ZeroDelay™ Technology	•	•	•	•
TruAcoustics™ with Personal Gain Integrator	•	•	•	•

## CONNECTIVITY

2.4 GHz control (Android and iOS)	•	•	•	•
2.4 GHz audio streaming (iOS)*	•	•	•	•
WidexLink to DEX assistive listening devices**	•	•	•	•

## APPS FOR iOS AND ANDROID

MOMENT App with SoundSense Learn	•	•	•	•
MOMENT App	•	•	•	•
TONELINK App	•	•	•	•
COM-DEX App	•	•	•	•


## FEATURES

Adaptation manager	•	•	•	•
Fluid Sound Analyser (sound classes)	11 (IE)	7 (IE)	4	3
Programs	5	4	3	3
Smartwind Manager	•			
High-frequency boost	•			
Speech Enhancer RT	RT/IE	IE		
Digital Pinna	•	•		
HD Locator	•	•	•	
TruSound Softener	•	•	•	
SoundSense Adapt	•	•	•	
Preference Control	•	•	•	•
Programmable Push Button***	•	•	•	•
Soft-level noise reduction	•	•	•	•
Noise Reduction	•	•	•	•
Zen/Relax	•	•	•	•
Audibility Extender	•	•	•	•


\*Ready for direct Android streaming. \*\*Also includes DEX assistive listening devices: TV-DEX, COM-DEX, RC-DEX, FM+ DEX, TV-PLAY. \*\*\*Programmable: As a program button and an on/off switch, As a sound adjustment button and an on/off switch, As a dedicated on/off switch.

For more information on smartphone compatibility please visit [www.widex.com/compatibility](http://www.widex.com/compatibility)


## MAXIMUM OUTPUT - EAR SIMULATOR

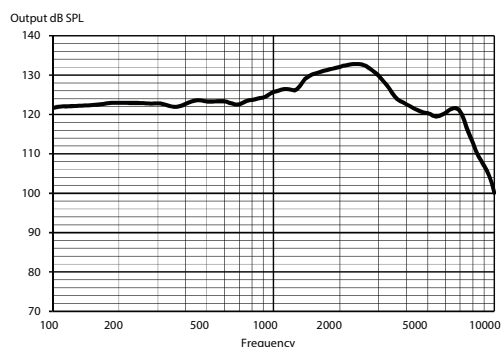


## MAXIMUM OUTPUT - 2CC COUPLER

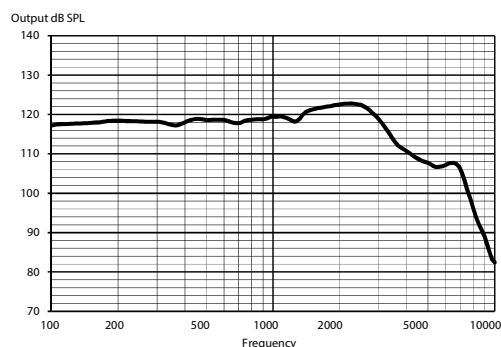

## OUTPUT - EAR SIMULATOR

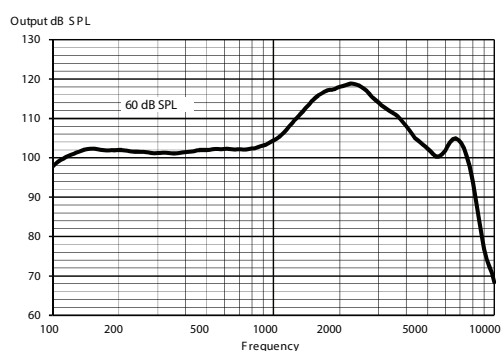

## OUTPUT - 2CC COUPLER

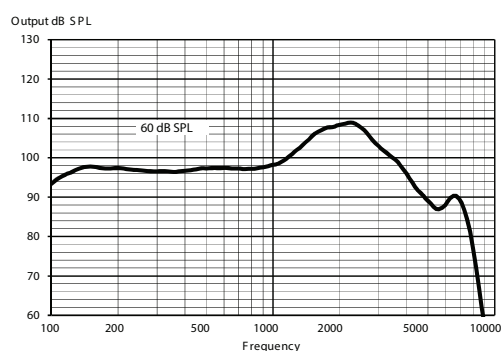

## Technical data:

Typical data obtained through standard pure tone measurements. Hearing aid set to Compass Reference Test Gain, unless stated otherwise. Measured using a standard ITE coupler without wax guard. For further information, please contact Widex at [global.widex.com](mailto:global.widex.com).

		EAR SIMULATOR IEC 60118-0:1983 + A1:1994	2CC COUPLER IEC 60118-0:2015 , ANSI S3.22-2014
OSPL90	1600 Hz Peak Average	131 dB SPL 133 dB SPL 127 dB SPL	122 dB SPL 123 dB SPL 121 dB SPL
Acoustic output (Input 60 dB SPL)	1600 Hz Peak Average	116 dB SPL 119 dB SPL 108 dB SPL	107 dB SPL 109 dB SPL 104 dB SPL
Full-on gain (Input 50 dB SPL, Compass Full-on gain)	1600 Hz Peak Average	68 dB 71 dB 69 dB	59 dB 65 dB 60 dB
Acoustic frequency range		100 Hz - 8050 Hz	100 Hz - 7550 Hz
Harmonic distortion (typical)	500 Hz 800 Hz 1600 Hz	<2% <2% <2%	<2% <2% <2%
Equivalent input noise		17 dB SPL	20 dB SPL
Battery drain (standby)		1.27 mA	1.27 mA
Battery drain*		1.43 mA	1.45 mA
Battery life* (Rechargeable lithium-ion battery)		35 h	35 h
Mobile phone immunity (IEC 60118-13:2019 Ed. 5.0, ANSI C63.19:2019)		IEC: Bystander and User: In compliance	ANSI: In compliance

\*Battery life in real-life situations depends among other things on the hearing aid features used and streaming time.

Do not modify this equipment without authorization of the manufacturer. Spare parts and instructions for correct repair can be acquired from Widex.